


## FIXED (STATIC) BOLLARD

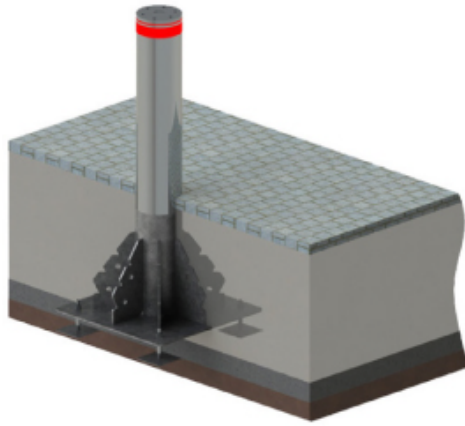

■ Operation	: Fixed - non-retractable
■ Diameter	: 220mm - 324mm (other diameters available optionally )
■ Height (Above ground)	: 500 - 1200mm (other heights available optionally)
■ Installation	: Ground embedding, easy fixed.
■ Options and Accessories	: Different material and colour options, 360° visible LED indicator.

*"Shape and sizes are reference only, Fixed bollards can be identical with your retractable bollard or are available in any other specific shape and dimension."*

	RBD 270 S.../RBD 324 S...	TBD 220 S.../TBD 270 S...
■ Wall Thickness	10 mm + 65/90mm special star formed solid beams of 5mm thickness.	5 mm.
■ Impact Resistance Crash Test	Designed and produced to withstand M40 (KB)	Can optionally be designed and produced to withstand M30(K4)
■ Outer Body Surface	Electrostatic powder coated hot dip galvanised steel (opt. stainless steel)	Stainless steel sleeve on hot dip galvanised body.
■ Visibility	Reflecting strips compliant to "E" standard, red/white/yellow colours.	Reflecting strips compliant to "E" standard, red/white/yellow colours.
■ Installation	Easy installation with adjustable balance pedestals and C30 grade concrete and steel rebar reinforcement.	Easy installation with adjustable balance pedestals and C30 grade concrete and steel rebar reinforcement.

**SmartGuard**<sup>®</sup>

· Smartguard is brand of Polimek ·